

V-303 Polyimide Prepreg

Park's V-303 is non-MDA condensation polyimide prepreg with a service temperature of 600°F.

Key Features & Benefits

- 600°F maximum service temperature
- Good Electrical properties for RF applications

Product Forms

- Available on a wide variety of reinforcements, including fiberglass, quartz and carbon
- Solution coated fabrics up to 60 inches wide
- Compatible with Autoclave or Press Molding processes

Applications / Qualifications

- Radomes
- Bearings
- Insulation

For Information about Park's materials:

Newton, KS +1.316.283.6500

info@parkaerospace.com

www.parkaerospace.com



V-303 Polyimide Prepregs

Prepreg Physical Properties

Reinforcement	7781 E-glass
Fabric Area Weight (gsm)	300
Prepreg Resin Content (%)	29 - 35
Volatiles (350°F, 15 min) (%)	10 - 40
Flow (350°F, 50 psi) (%)	25 - 35
Gel Time (350°F) (sec)	85 - 95

Processing Guidelines

Prepreg Storage Life

- Out Life: 30 days @ 75°F
- Shelf Life: 3 months @ 40°F
6 months @ 0°F

Note: The following guidelines are provided to assist Park material users with general recommendations for successful processing. The recommendations are for general review purposes only and process adjustments may be required to achieve optimum results in your specific manufacturing environment.

Autoclave Cure Cycle

- Apply full vacuum, 27" minimum
- Heat to 160 ±5 °F at 1°F/min maximum
- Hold 1 hour at 160 ±5 ° F
- Heat to 230 ±5 °F at 1°F/min maximum
- Hold 2 hours at 230 ±5 ° F
- Heat to 270 ±5 °F at 1°F/min.
- Apply 45 psi and hold 2 hours at 270 ±5 °F
- Heat 3°F/min to 350 ±5 °F
- Hold 2 hour at 350±5° F
- Cool under pressure and vacuum to less than 150°F and remove part.


Oven post cure (free standing):

- 1 hour at 350±5°F
- 2 hours at 400±5°F
- 2 hours at 450±5°F
- 2 hours at 500±5°F
- 2 hours at 550±5°F
- 2 hours at 600±5°F
-

Note: There must be multiple vacuum ports on the lay-up to allow maximum efficiency in removing volatiles. Vacuum hoses should be 3/8" diameter minimum. Preferably, there should be a cold trap on the vacuum lines between the part and the vacuum pump to prevent degradation of the pump oil.



Aerospace Composite Materials

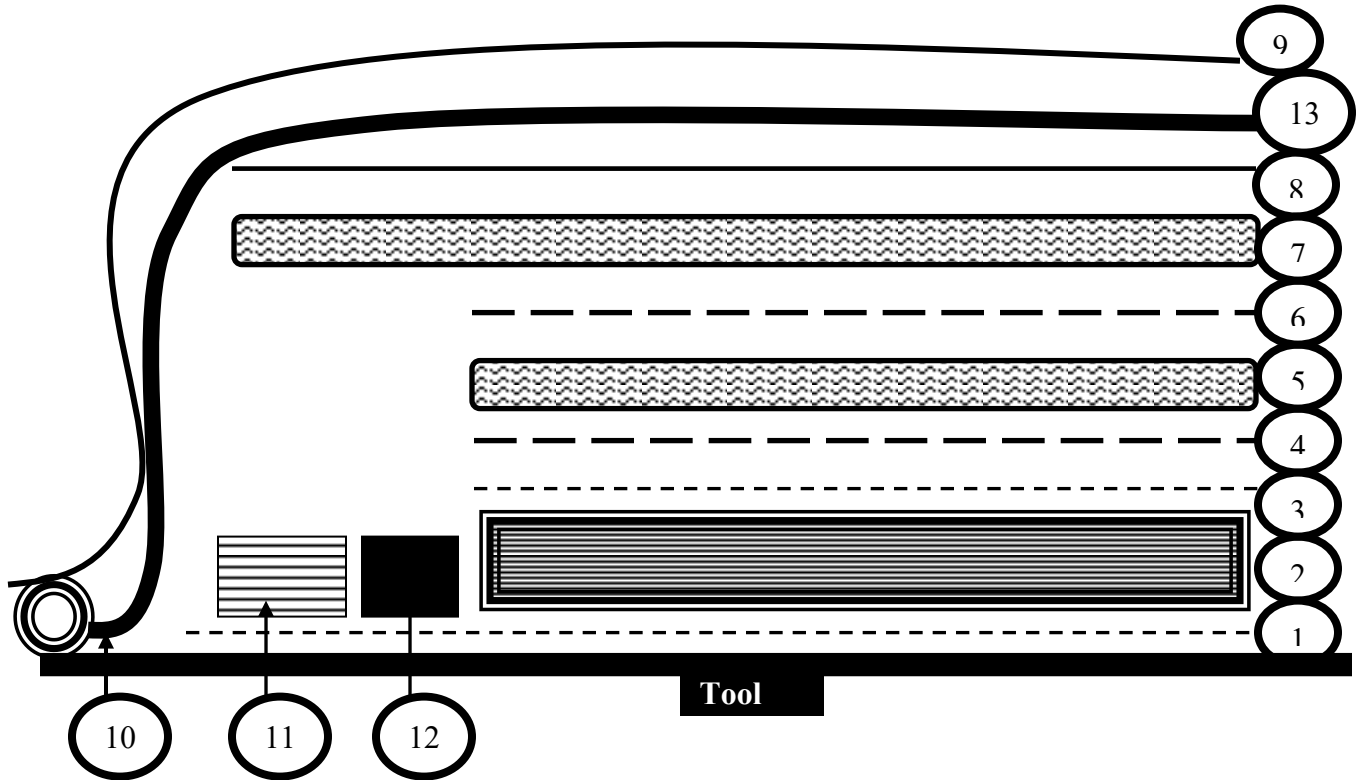

1. Peel ply or porous Teflon coated glass, 1" larger than part
2. V-303 lay-up
3. Peel ply or porous Teflon coated glass, same size as part
4. Perforated release film, holes on 3" centers
5. Glass bleeder cloth, such as 7500 tooling cloth or 7781
[one ply bleeder for every 2-3 plies of prepreg]
6. Perforated release film, holes on 3" centers
7. Glass bleeder cloth, such as 7500 tooling cloth or 7781, 3 plies
8. Non-Porous Teflon
9. Vacuum bag
10. Bag Sealant
11. Edge breather -3plies of tooling cloth
12. Mold released steel dams – optional (not required)
13. Breather N-10

All test data provided are typical values and not intended to be specification values. For review of critical specification tolerances, please contact a Park representative directly. Park reserves the right to change these typical values as a natural process of refining our testing equipment and techniques.

V-303 Polyimide Prepregs

Laminate Physical / Mechanical Properties

Reinforcement	7781 E-glass
Tensile Strength, 0° (Ksi) 75°F Dry ASTM-D-638 Type 1	61
Tensile Modulus, 0° (Msi) 75°F Dry ASTM-D-638 Type 1	3.7
Compressive Strength (Ksi) 75°F Dry ASTM-D-695	59
Compressive Modulus (Msi) 75°F Dry ASTM-D-695	4.1
Flexural Strength (Ksi) 75°F Dry ASTM-D-790	72
Flexural Modulus (Msi) 75°F Dry ASTM-D-790	3.4
Short Beam Shear (Ksi) 75°F Dry ASTM-D-790	4.1
Glass Transition by DMA	792°F / 422°C
Laminate Density g/cc	1.74

All test data provided are typical values and not intended to be specification values. For review of critical specification tolerances, please contact a Park representative directly. Park reserves the right to change these typical values as a natural process of refining our testing equipment and techniques.

All test data provided are typical values and not intended to be specification values. For review of critical specification tolerances, please contact a company representative directly.

Park Aerospace Corp. reserves the right to make changes without notice to any products described herein. Park does not assume any liability arising out of the application or use of any product described herein; and it does not grant any license under its patent or other rights or any such rights of others. Park also disclaims all warranties whether expressed, implied or statutory, including implied warranties of merchantability or fitness for a particular purpose.

Aeroglide®, ALPHA STRUT™, CoreFix®, Easycure E-710®, Electroglide®, Electrovue™, Peelcote™, Powerbond™, RadarWave™, SIGMA STRUT™ and Tin City Aircraft Works™ are trademarks or servicemarks of Park Electrochemical Corp. and Park Aerospace Corp.

